Ironbark
Sleek. Strong. Sustainable.

THERMALWOOD CANADA

Ironbark Decking Profiles

THERMALLY MODIFIED ASH · THERMO-D
FAS SELECT & BETTER


4/4 Snap-To-It Decking

4⅝" × ⅞" (118 × 22 mm)

Back-groove board with a crowned face that sheds water.

EDGE	13⁄16" (20.5 mm)
FACE	Crowned
FASTENING	GRAD clips



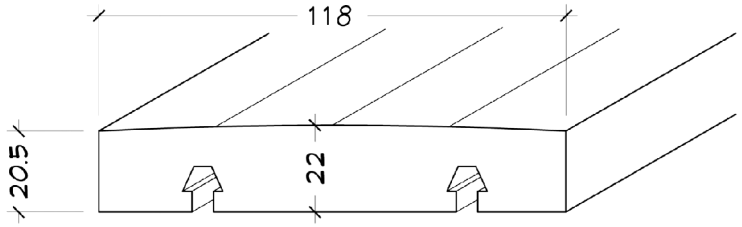


5/4 Snap-To-It Decking

4⅝" × 1" (118 × 25 mm)

The heavier back-groove board, with the same crowned face.

EDGE	15⁄16" (23.5 mm)
FACE	Crowned
FASTENING	GRAD clips



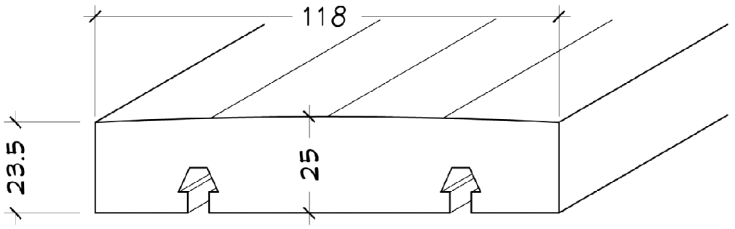


4/4 Side-Groove Decking

4¾–5½" × 13⁄16" (120–140 × 21 mm)

Edge grooves and rounded edges, with a flat or crowned top.


GROOVE	¼" (6 mm)
FACE	Flat or crowned
FASTENING	T-clips



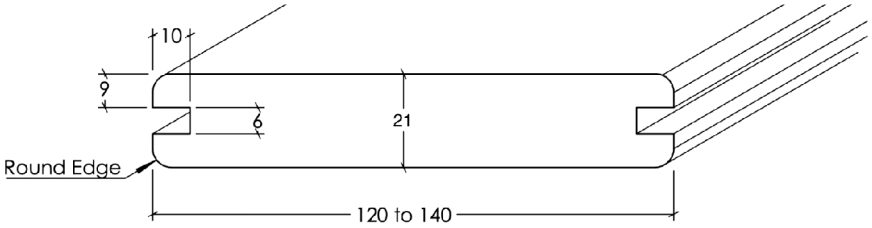

GRAD Clip

14½" (368 mm) long · For 4/4 and 5/4 Snap-To-It decking · Holds three boards, two harpoons each · POM (polyoxymethylene) · Tested for shear in extreme cold

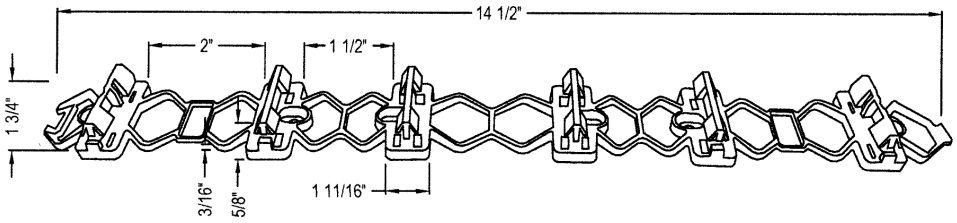

Profile drawings in millimetres; clip drawing in inches. Do not scale; confirm critical dimensions before ordering.

thermalwoodcanada.com · 1 (506) 548-9126